

# Product Data Sheet

## Elastosave ES 30

Order No. 2094



Strong, but relatively thin protection and anti-slip-mat of recycling rubber pieces; for use under stilted surfaces.



### Technical Data

#### Elastosave ES 30

High quality protection and anti-slip-mat made of recycling rubber pieces. Suitable for the protection of waterproofing e.g. under stilted terrace surfaces.

Thickness:	ca. 3 mm
Weight:	ca. 2.6 kg/m <sup>2</sup>
Colour:	black
Tensile strength:	ca. 0.8 N/mm <sup>2</sup>
Elongation of break:	ca. 125%
Temperature resistance:	-30°C up to +80°C
Friction coefficient (dry):	ca. 0.99
Dimensions:	
Roll width:	ca. 1.50 m
Roll length:	ca. 8.00 m


Perfect protection, e.g. underneath ZinCo Elefeet®-pedestals

### Features

- high quality protection of waterproofing
- high compressive strength
- protection layer according to German Standard DIN 18195, Part 10
- non-slip
- non-rotting and resistant to water
- quick and easy installation
- compatible with bitumen (on non-bitumen-resistant layers additional slip sheets are necessary e.g. ZinCo TGF 20)

### Application Example

#### "Stilted walkway"

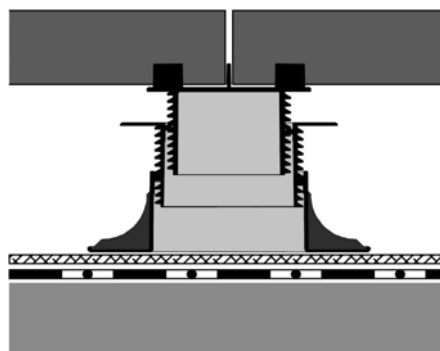

Concrete slabs

Vertically adjustable stilted pedestal "ZinCo-Elfeet"

Elastosave ES 30

Roof construction with root resistant waterproofing

### Specification Suggestion

High quality protection and anti-slip-mat made of recycling rubber pieces; compatible with bitumen, non-rotting, height ca. 3 mm, weight ca. 2.6 kg/m<sup>2</sup>, tensile strength ca. 0.8 N/mm<sup>2</sup>, elongation of break ca. 125 %, temperature resistance -30 to +80°C, friction

coefficient (dry) ca. 0.99, delivery and installation according to manufacturer's instructions.

Make: ZinCo Elastosave ES 30  
Enquiries: ZinCo GmbH,  
Phone: +49 7022 6003-0

